2024 Hopper Walker 2 Hole Box Wiring for Joystick and Stop Switch

Make sure joystick handle is attached to switch blocks before applying power to avoid blowing a fuse.

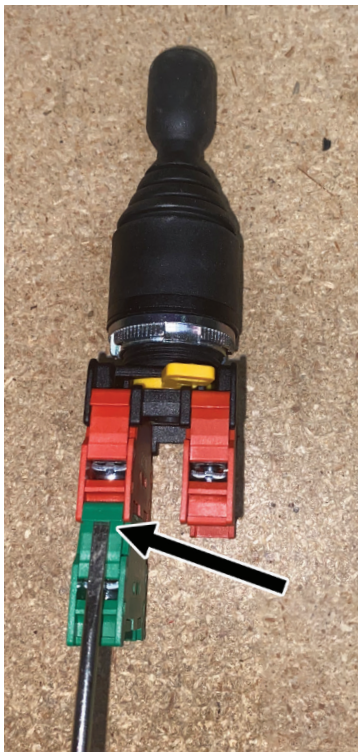

Using a flat blade screwdriver, gently lift up on the green tab to remove the green terminal blocks.

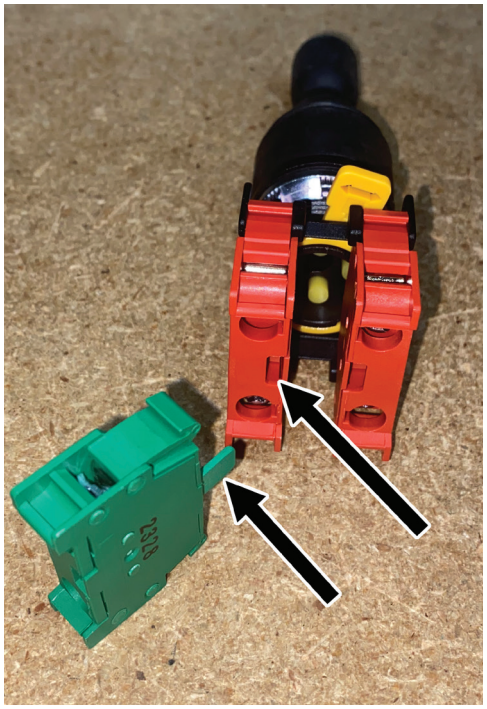

- Remove the joystick from the terminal blocks by sliding the yellow tab to the left.
- Install the wires to the red terminal blocks (see next page) before reattaching the green terminal blocks.
- When reattaching the green terminal blocks, make sure the green tab goes in the red slot.
- Install the wires to the green terminal blocks.
- Attach the joystick to the switch blocks through the top cover and slide the yellow tab to the right to lock the joystick in place.

***** Do not apply power until the joystick has been locked in place.*****
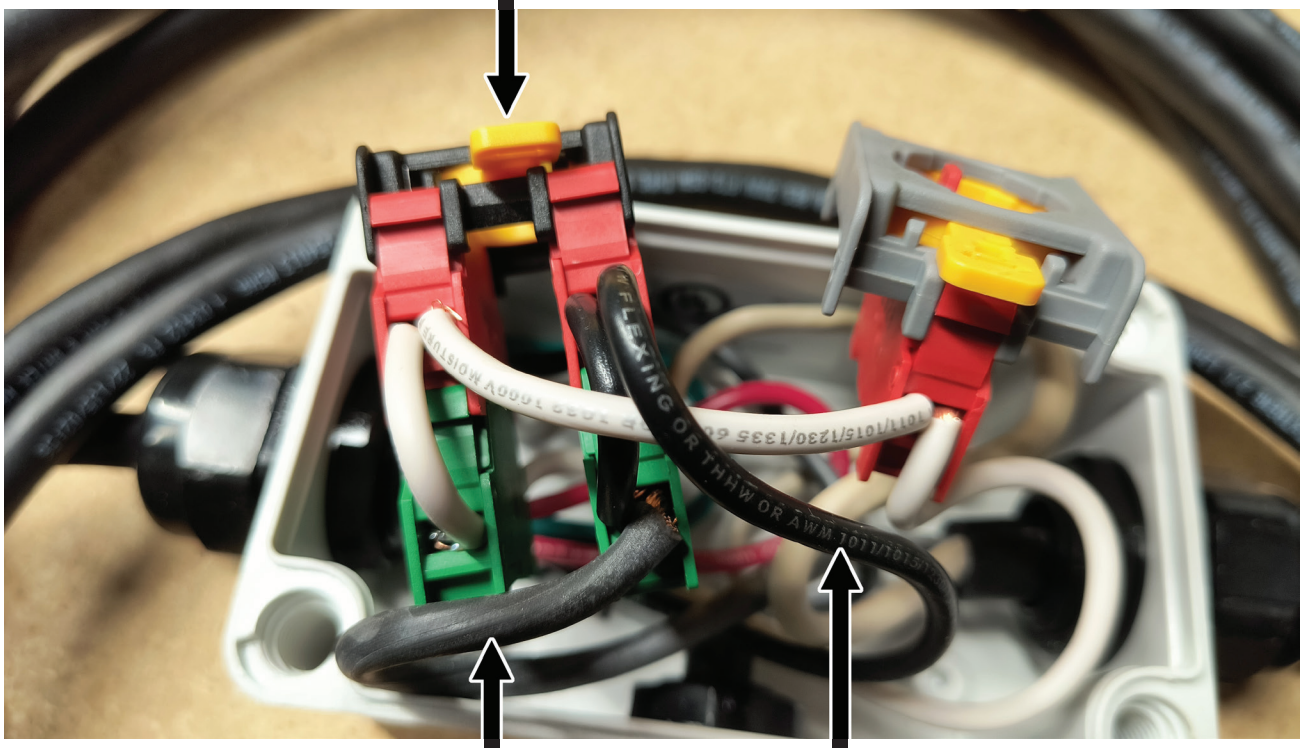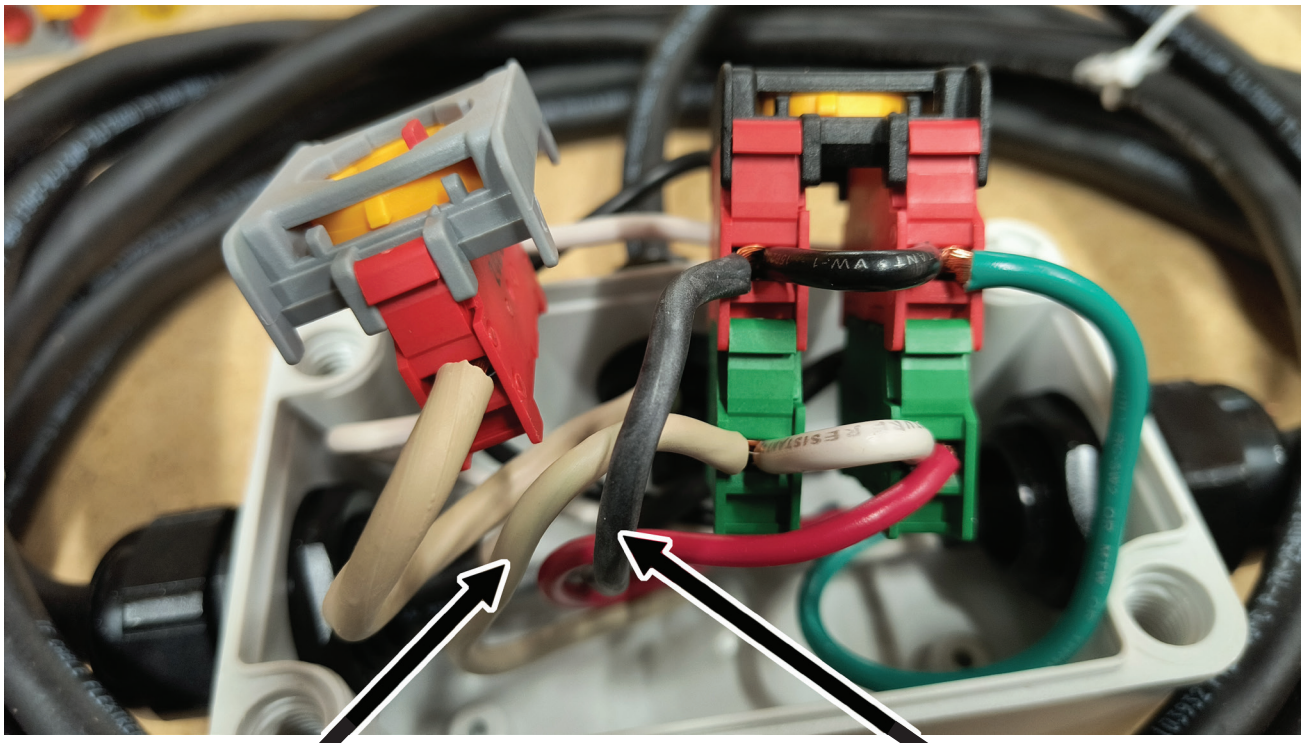
2024 Hopper Walker 2 Hole Box Wiring
for joystick and stop switch